


FIBRE CEMENT FLOOR DECKING FIXED AS PER MANUFACTURERS WRITTEN INSTRUCTIONS. PRIOR TO INSTALLATION FULLY PAINT UNDERSIDES OF EACH BOARD WITH CROMMELIN OR EQUIVALENT SEALER. ALL JOINTS IN DECKING TO BE SEALED WITH A POLYURETHANE SEALANT IN ACCORDANCE WITH THE MANUFACTURERS WRITTEN INSTRUCTIONS (TYP.).

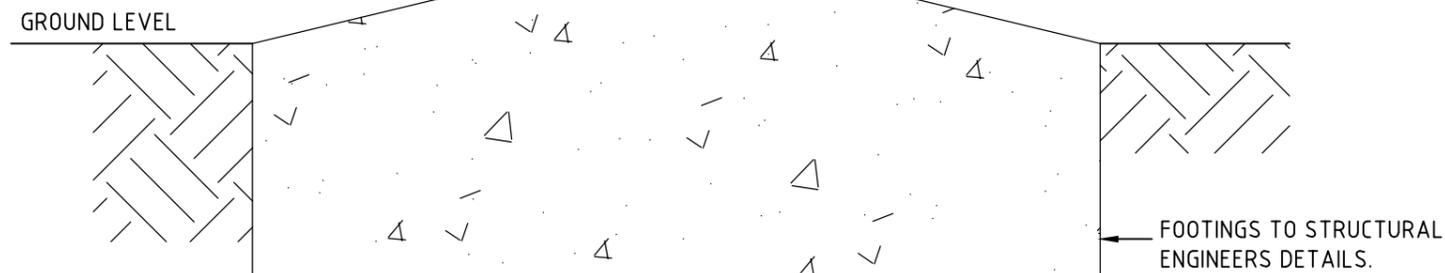

TYPICAL FIBRE CEMENT DECKED, FRAMED FLOOR WITH PAINT APPLIED VAPOUR BARRIER DETAIL.

- LEGEND**
- LAYER 3 - VAPOUR BARRIER TO AIR-CONDITIONED SPACES: REFER TO INSTALLATION NOTES OF GENERAL REQUIREMENTS ON DRAWING B15-2501.
 - LAYER 5 - GLASS WOOL WALL INSULATION: REFER TO INSTALLATION NOTES OF GENERAL REQUIREMENTS ON DRAWING B15-2501.

No.	DESCRIPTION	DATE	INIT.	DEPT./COMPANY.
1	1st ISSUE	09-02-18	SG	DIPL
AMENDMENTS				

IMPORTANT NOTE:
 DETAILS AS SHOWN ARE GENERIC AND ARE INTENDED TO BE USED AS A GUIDE ONLY - REFER DESIGN INTENT ON DRAWING No: B15-2501.
DESIGN CONSULTANTS TO ADAPT DETAILS TO SUIT EACH PROJECT AS REQUIRED.

DRAWN SG	CHECKED -
DATE JAN 2018	DATE -
DESIGNED SG	CHECKED -
DATE JAN 2018	DATE -
DESIGN PROJECT LEADER -	NTG PROJECT MANAGER MT
DATE -	DATE -



DARWIN - VARIOUS REGIONS VAPOUR BARRIERS - GENERIC DETAILS					
TYPICAL FIBRE CEMENT DECKED, FRAMED FLOOR DETAIL WITH PAINT APPLIED VAPOUR BARRIER DETAIL					
NTG PROJECT No.	NTG ASSET No.	SHEET No. 1 OF 1	NTG DRAWING No. B18-2300	AMENDMENT 1	SHEET SIZE A3