
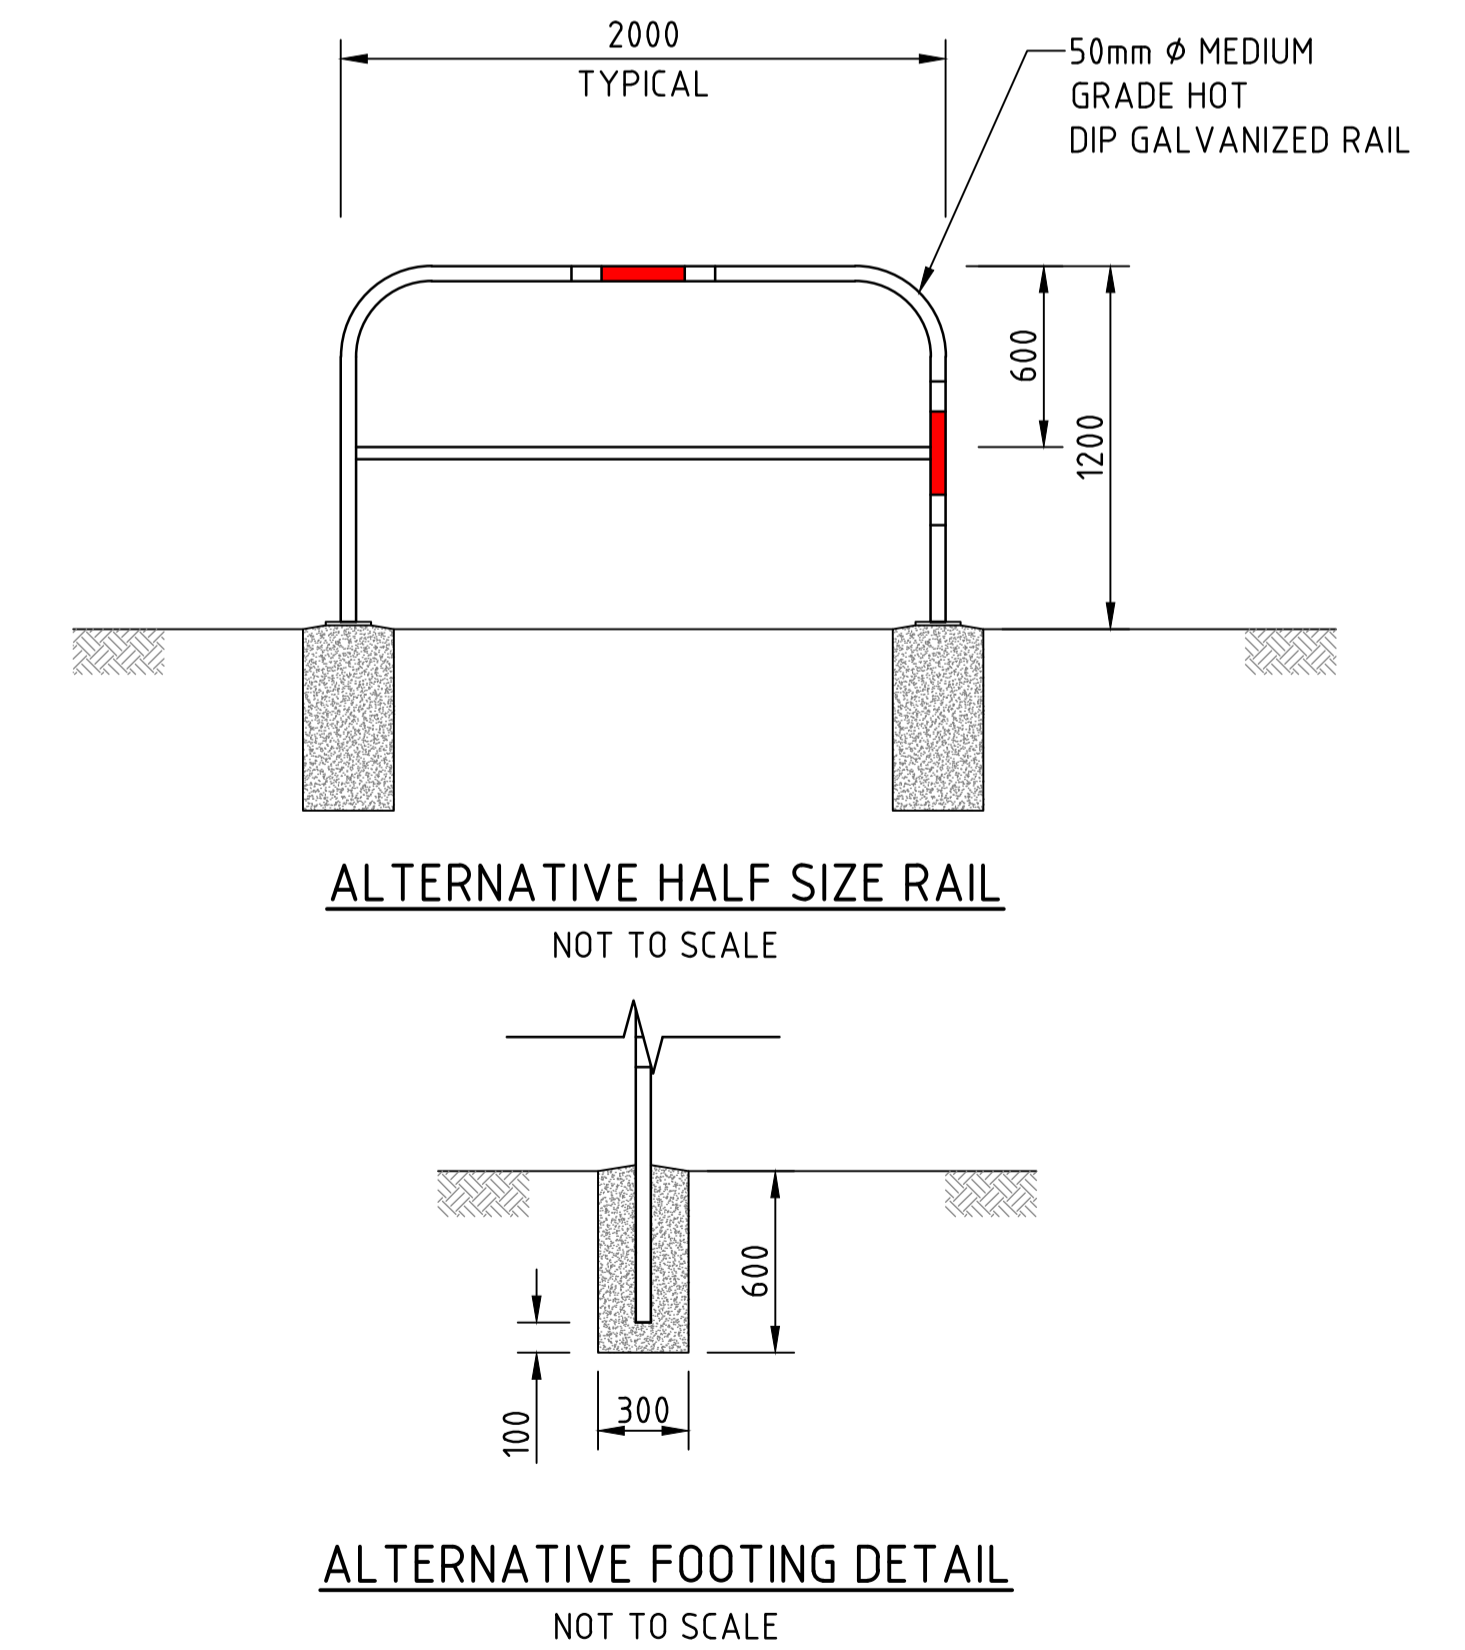
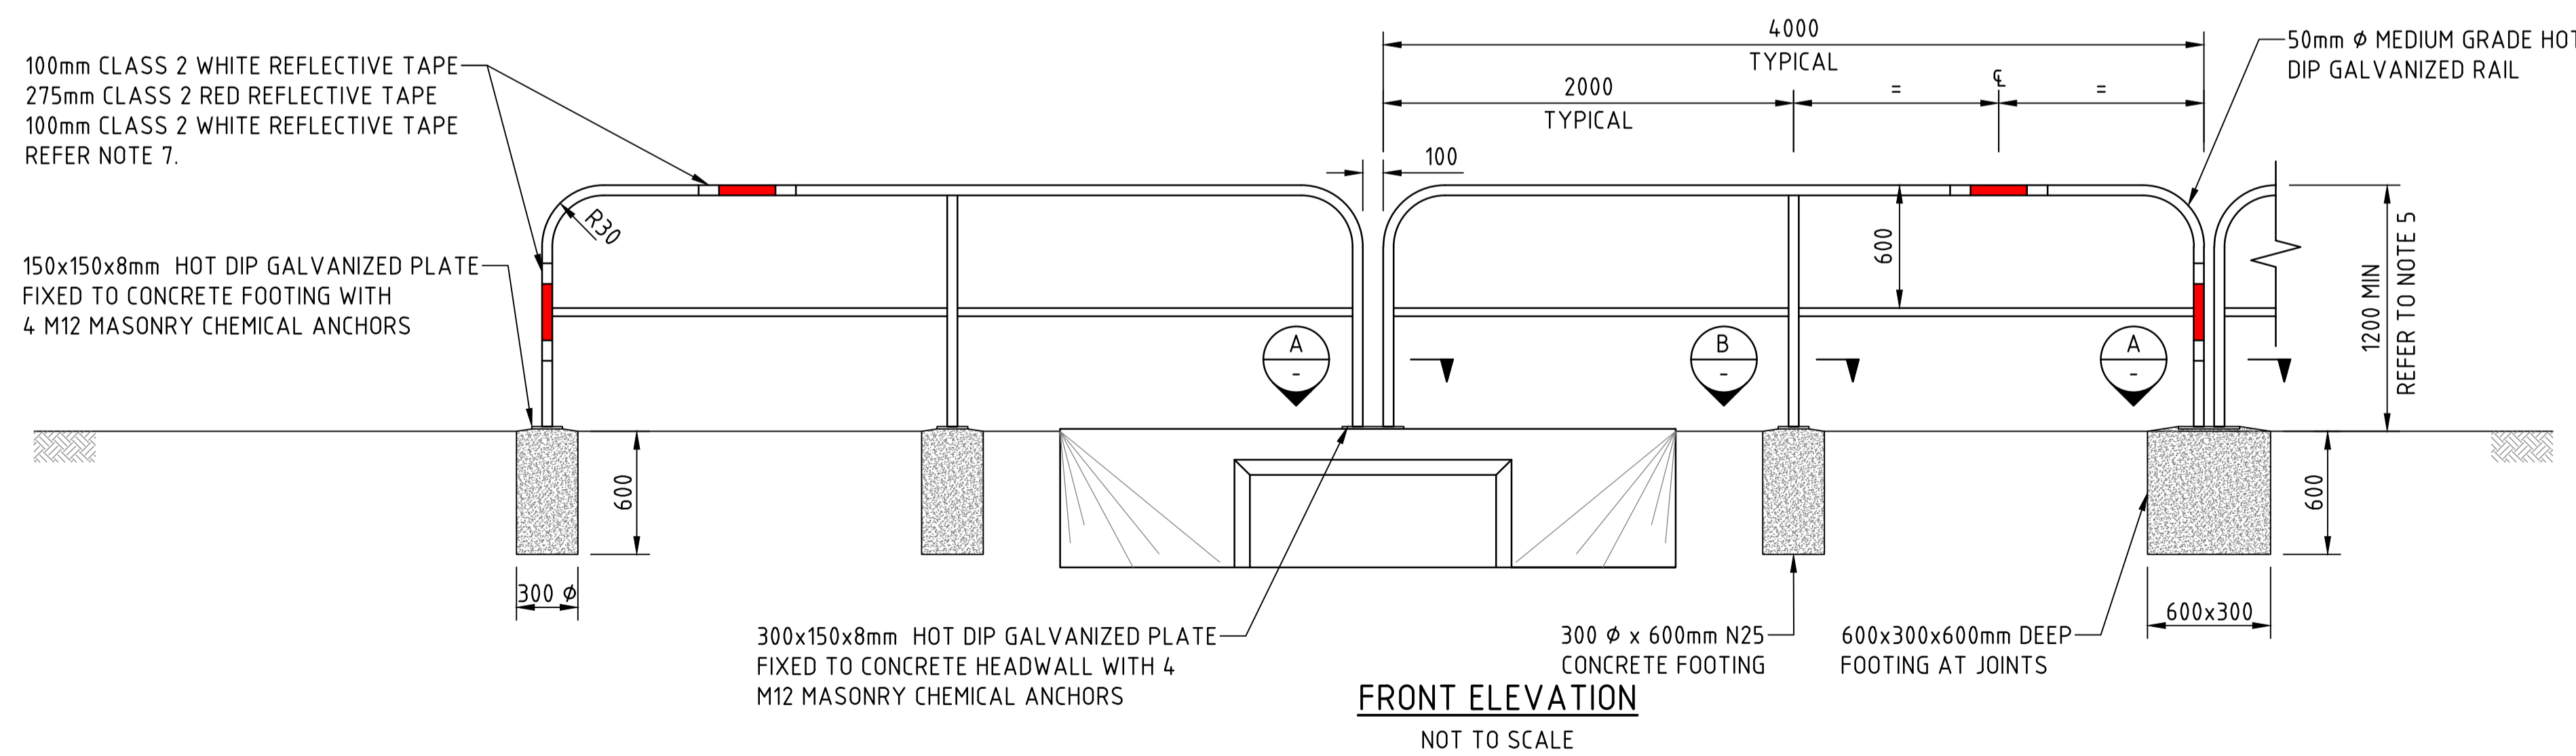
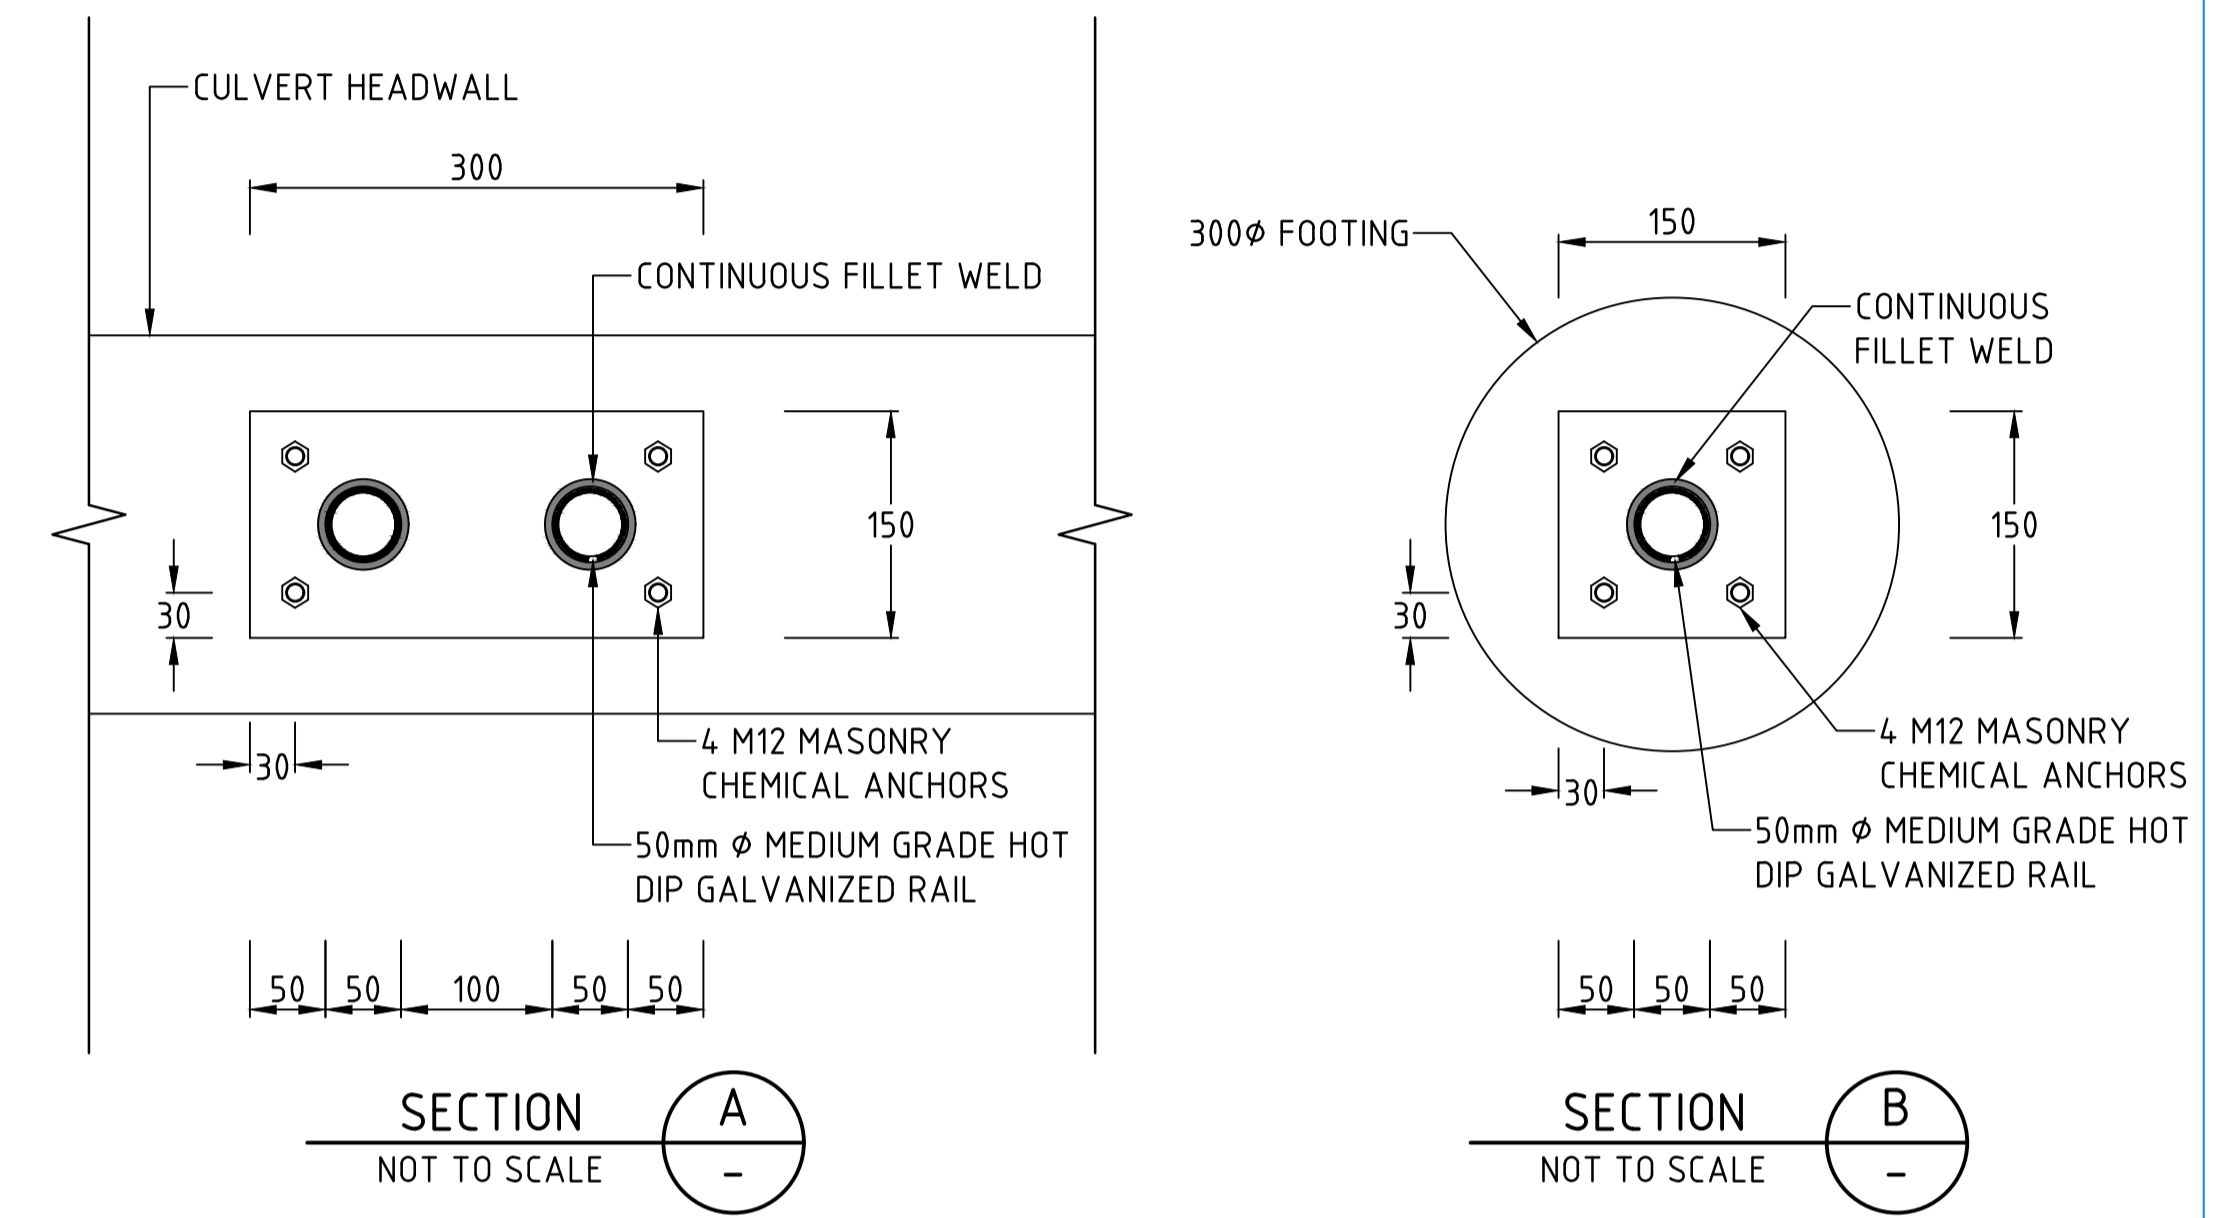


**NOTES:**

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
2. ALL CONCRETE TO BE N25 TO AS 1379 AND AS 3600.
3. BEND RAILS TO REQUIRED SHAPE, DO NOT WELD.
4. WELD PLATE TO RAIL AND HOT DIP GALVANISE. ENSURE FINISH IS FREE OF ALL BURS BEFORE INSTALLATION.
5. THE FENCE HEIGHT SHALL BE VERIFIED BY A RISK ASSESSMENT OF THE LOCATION. THE DESIRABLE HEIGHT IS 1.4m; MINIMUM HEIGHT OF 1.2m MAY BE USED WHERE THE SEVERITY OF THE HAZARD IS CONSIDERED TO BE LOW; A HEIGHT > 1.4m SHALL BE CONSIDERED WHERE ADJACENT HAZARD ARE SEVERE AS DEFINED IN AUSTRROAD GUIDE ROAD DESIGN PART 6A.
6. PROVIDE RELIEF HOLES FOR GALVANIZING PURPOSES TO FENCE PANELS ALONG UNDERSIDE OF RAILS.
7. PROVIDE REFLECTIVE TAPE AS PER DETAILS TO ALL PANELS WITHIN FENCE LENGTH TO PROVIDE A VISUAL AID OF HORIZONTAL AND VERTICAL MEMBERS.

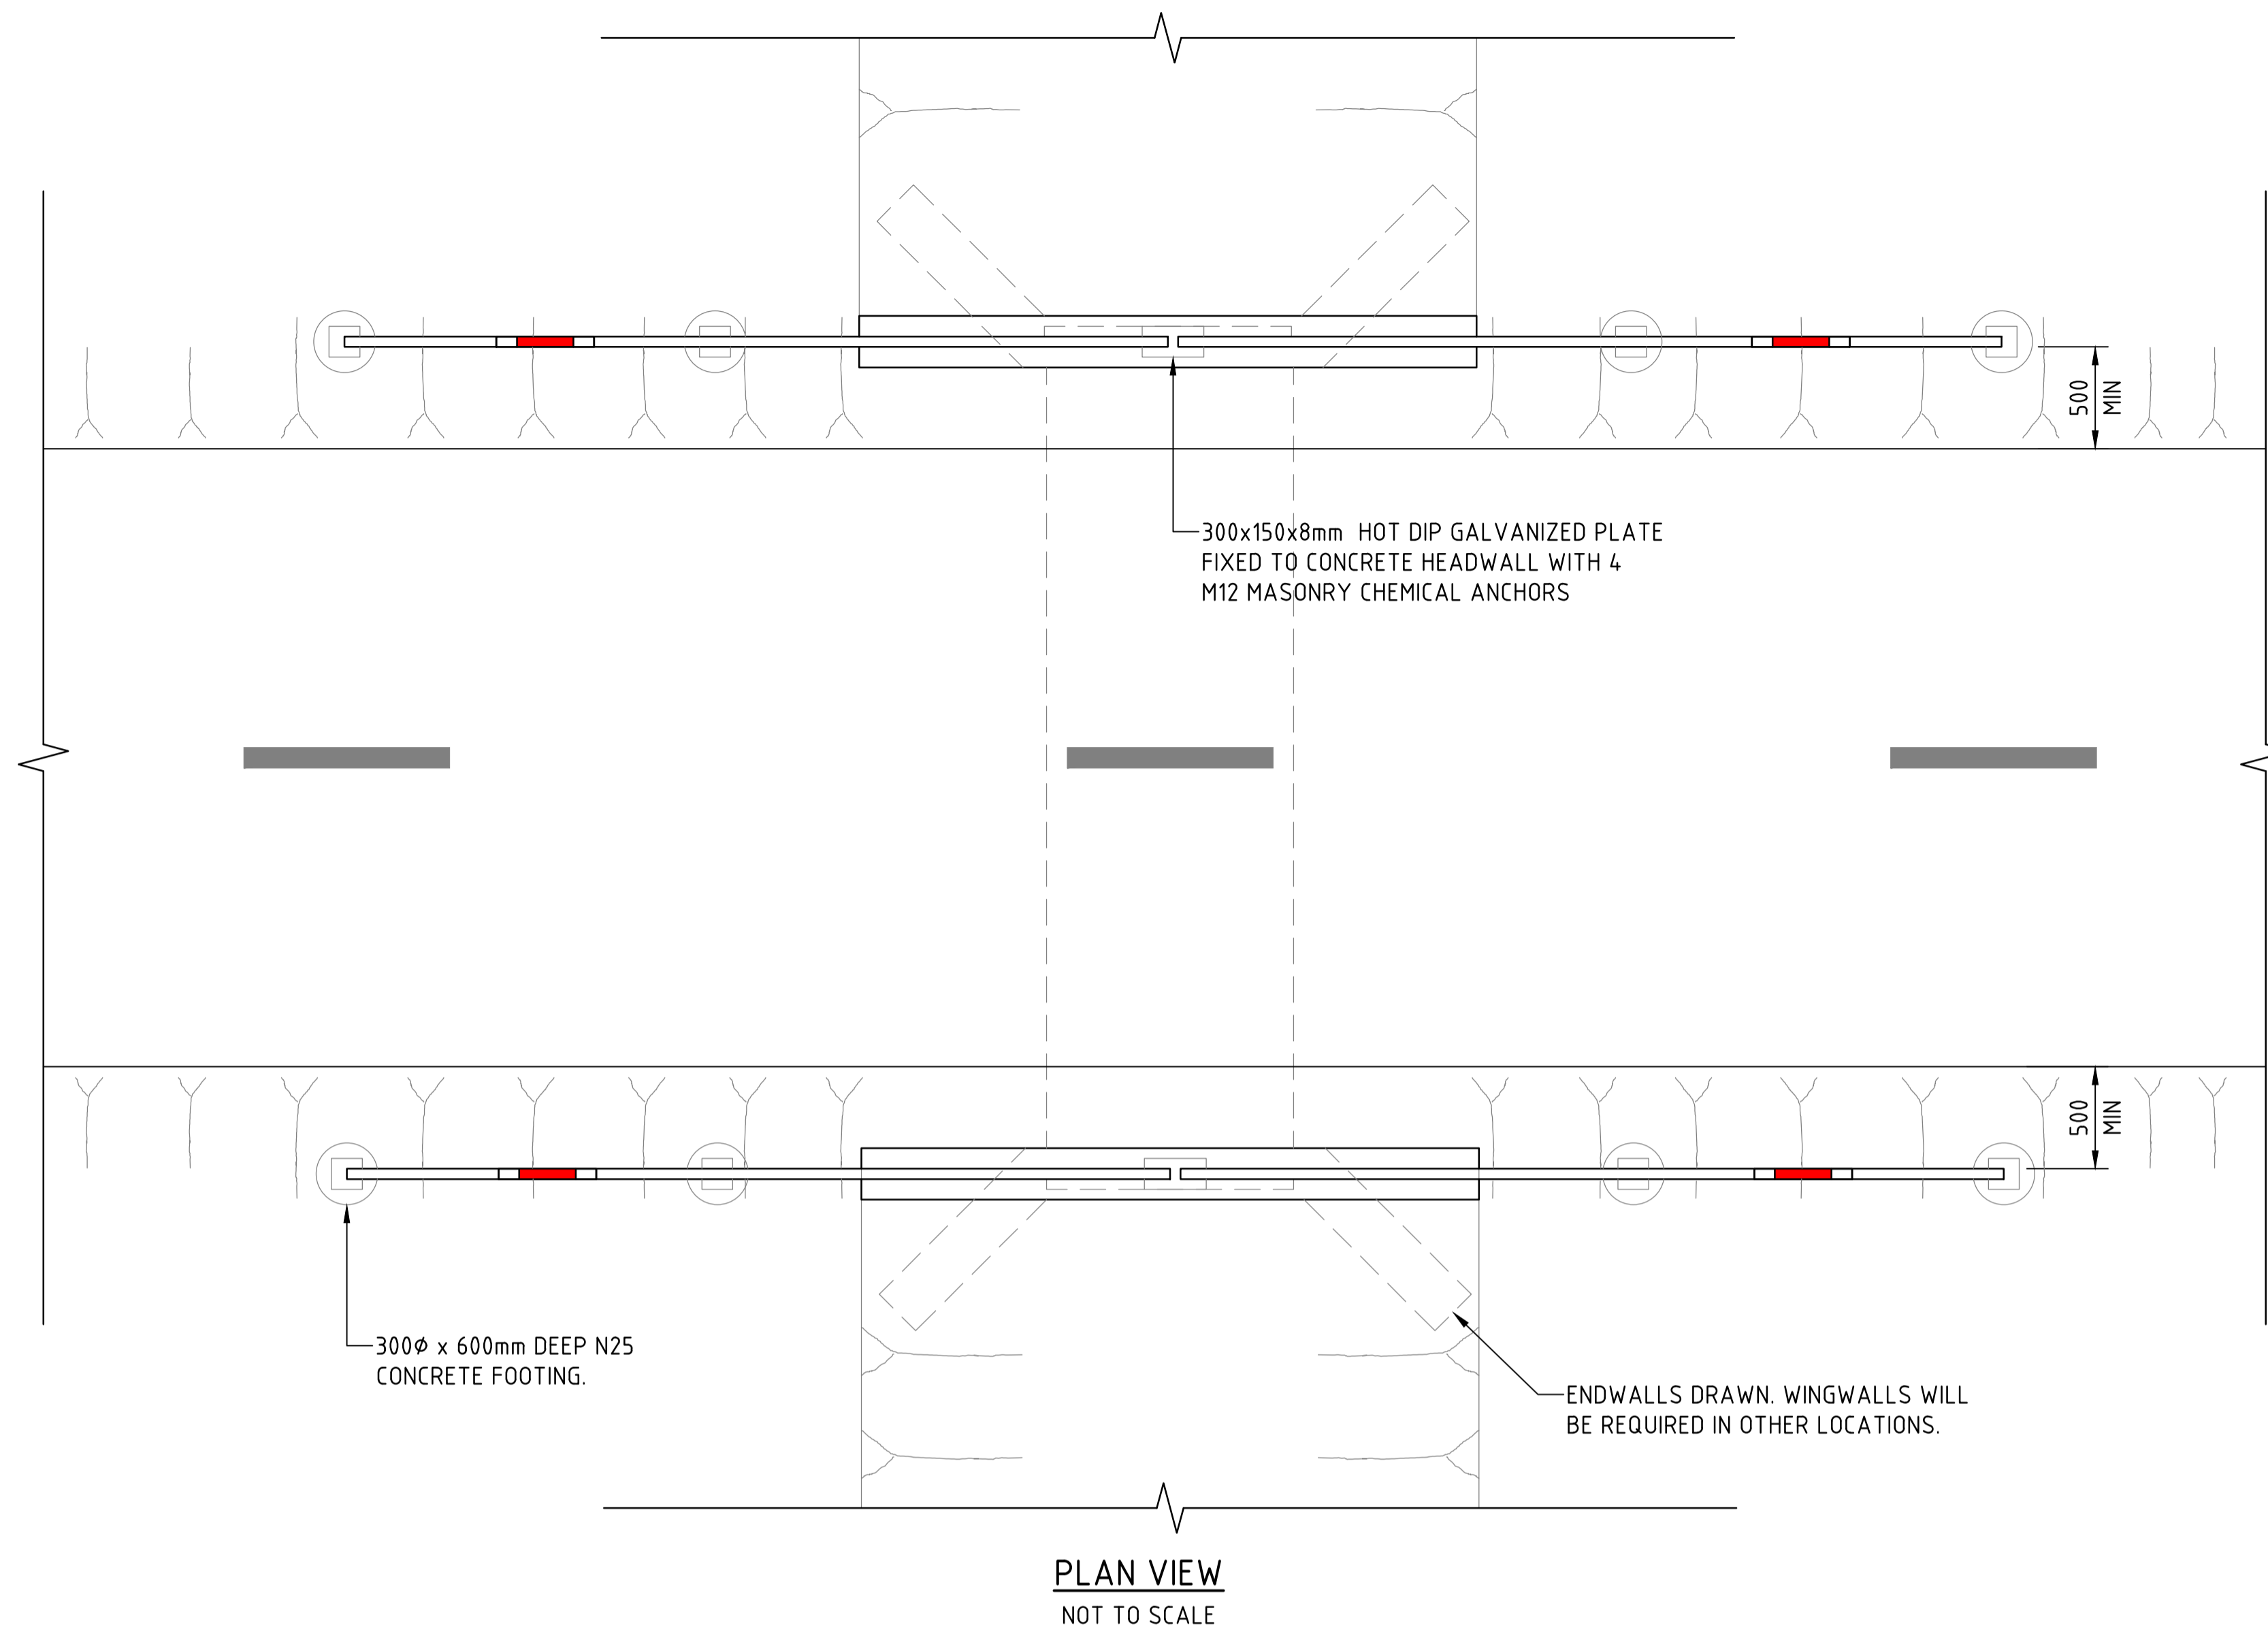

No.	DESCRIPTION	DATE	NAME	DEPT./COMPANY
3	MINOR CHANGES	JAN 2024	D.LLANO	DIPL
2	500mm CLEARANCE TO RAIL, PLATE DETAIL ADDED	SEP 2021	N.K	EES/DIPL
1	NOTE ADDED	MAR 2019	S.SHI	EES/DIPL
0	ISSUED AS A STANDARD DRAWING	SEPT 2017	J.LEESON	EES/DIPL
AMENDMENTS				

**WARNING**  
BEWARE OF UNDERGROUND SERVICES.  
THE LOCATIONS OF UNDERGROUND SERVICES ARE APPROXIMATE ONLY AND THEIR EXACT POSITION SHOULD BE PROVEN ON SITE. NO GUARANTEE IS GIVEN THAT ALL EXISTING SERVICES ARE SHOWN.

DRAWN J.LEESON	CHECKED S.HATZI
DATE APRIL 2017	DATE APRIL 2017
DESIGNED N.KNIBBS	CHECKED B.O'DONNELL
DATE DEC 2014	DATE DEC 2014
DESIGN LEADER S.HATZI	DESIGN DIRECTOR S.JACKSON
DATE 1/09/2017	DATE 1/09/2017



STANDARD DRAWINGS  
KERBING, FENCING & LANDSCAPING

CYCLE/SHARED PATH CULVERT CROSSING  
FENCE DETAILS

FILE No.	ASSET No.	SHEET No.	DRAWING No.	AMEND.	SHEET SIZE
-	-	1 OF 1	CS3306	3	A1