


**ITEM 1**  
NOT TO SCALE

- PHOTOELECTRIC LIGHTING CONTROL
- VOLTAGE - 220-240V
  - CURRENT RATING - 3A
  - BASE TYPE - D2
  - COVER - POLYPROPYLENE
  - BASE - HIGH-TEMP POLYESTER (PBT)
  - SENSOR - NON-DRIFTING PHOTOTRANSISTOR
  - STANDARDS - AS 1158.6, ANSI C136.10
  - SURGE PROTECTION - MOV
  - TURN ON - 30 LUX
  - OFF:ON RATIO - 0.6:1
  - ON-TIME DELAY - INSTANT

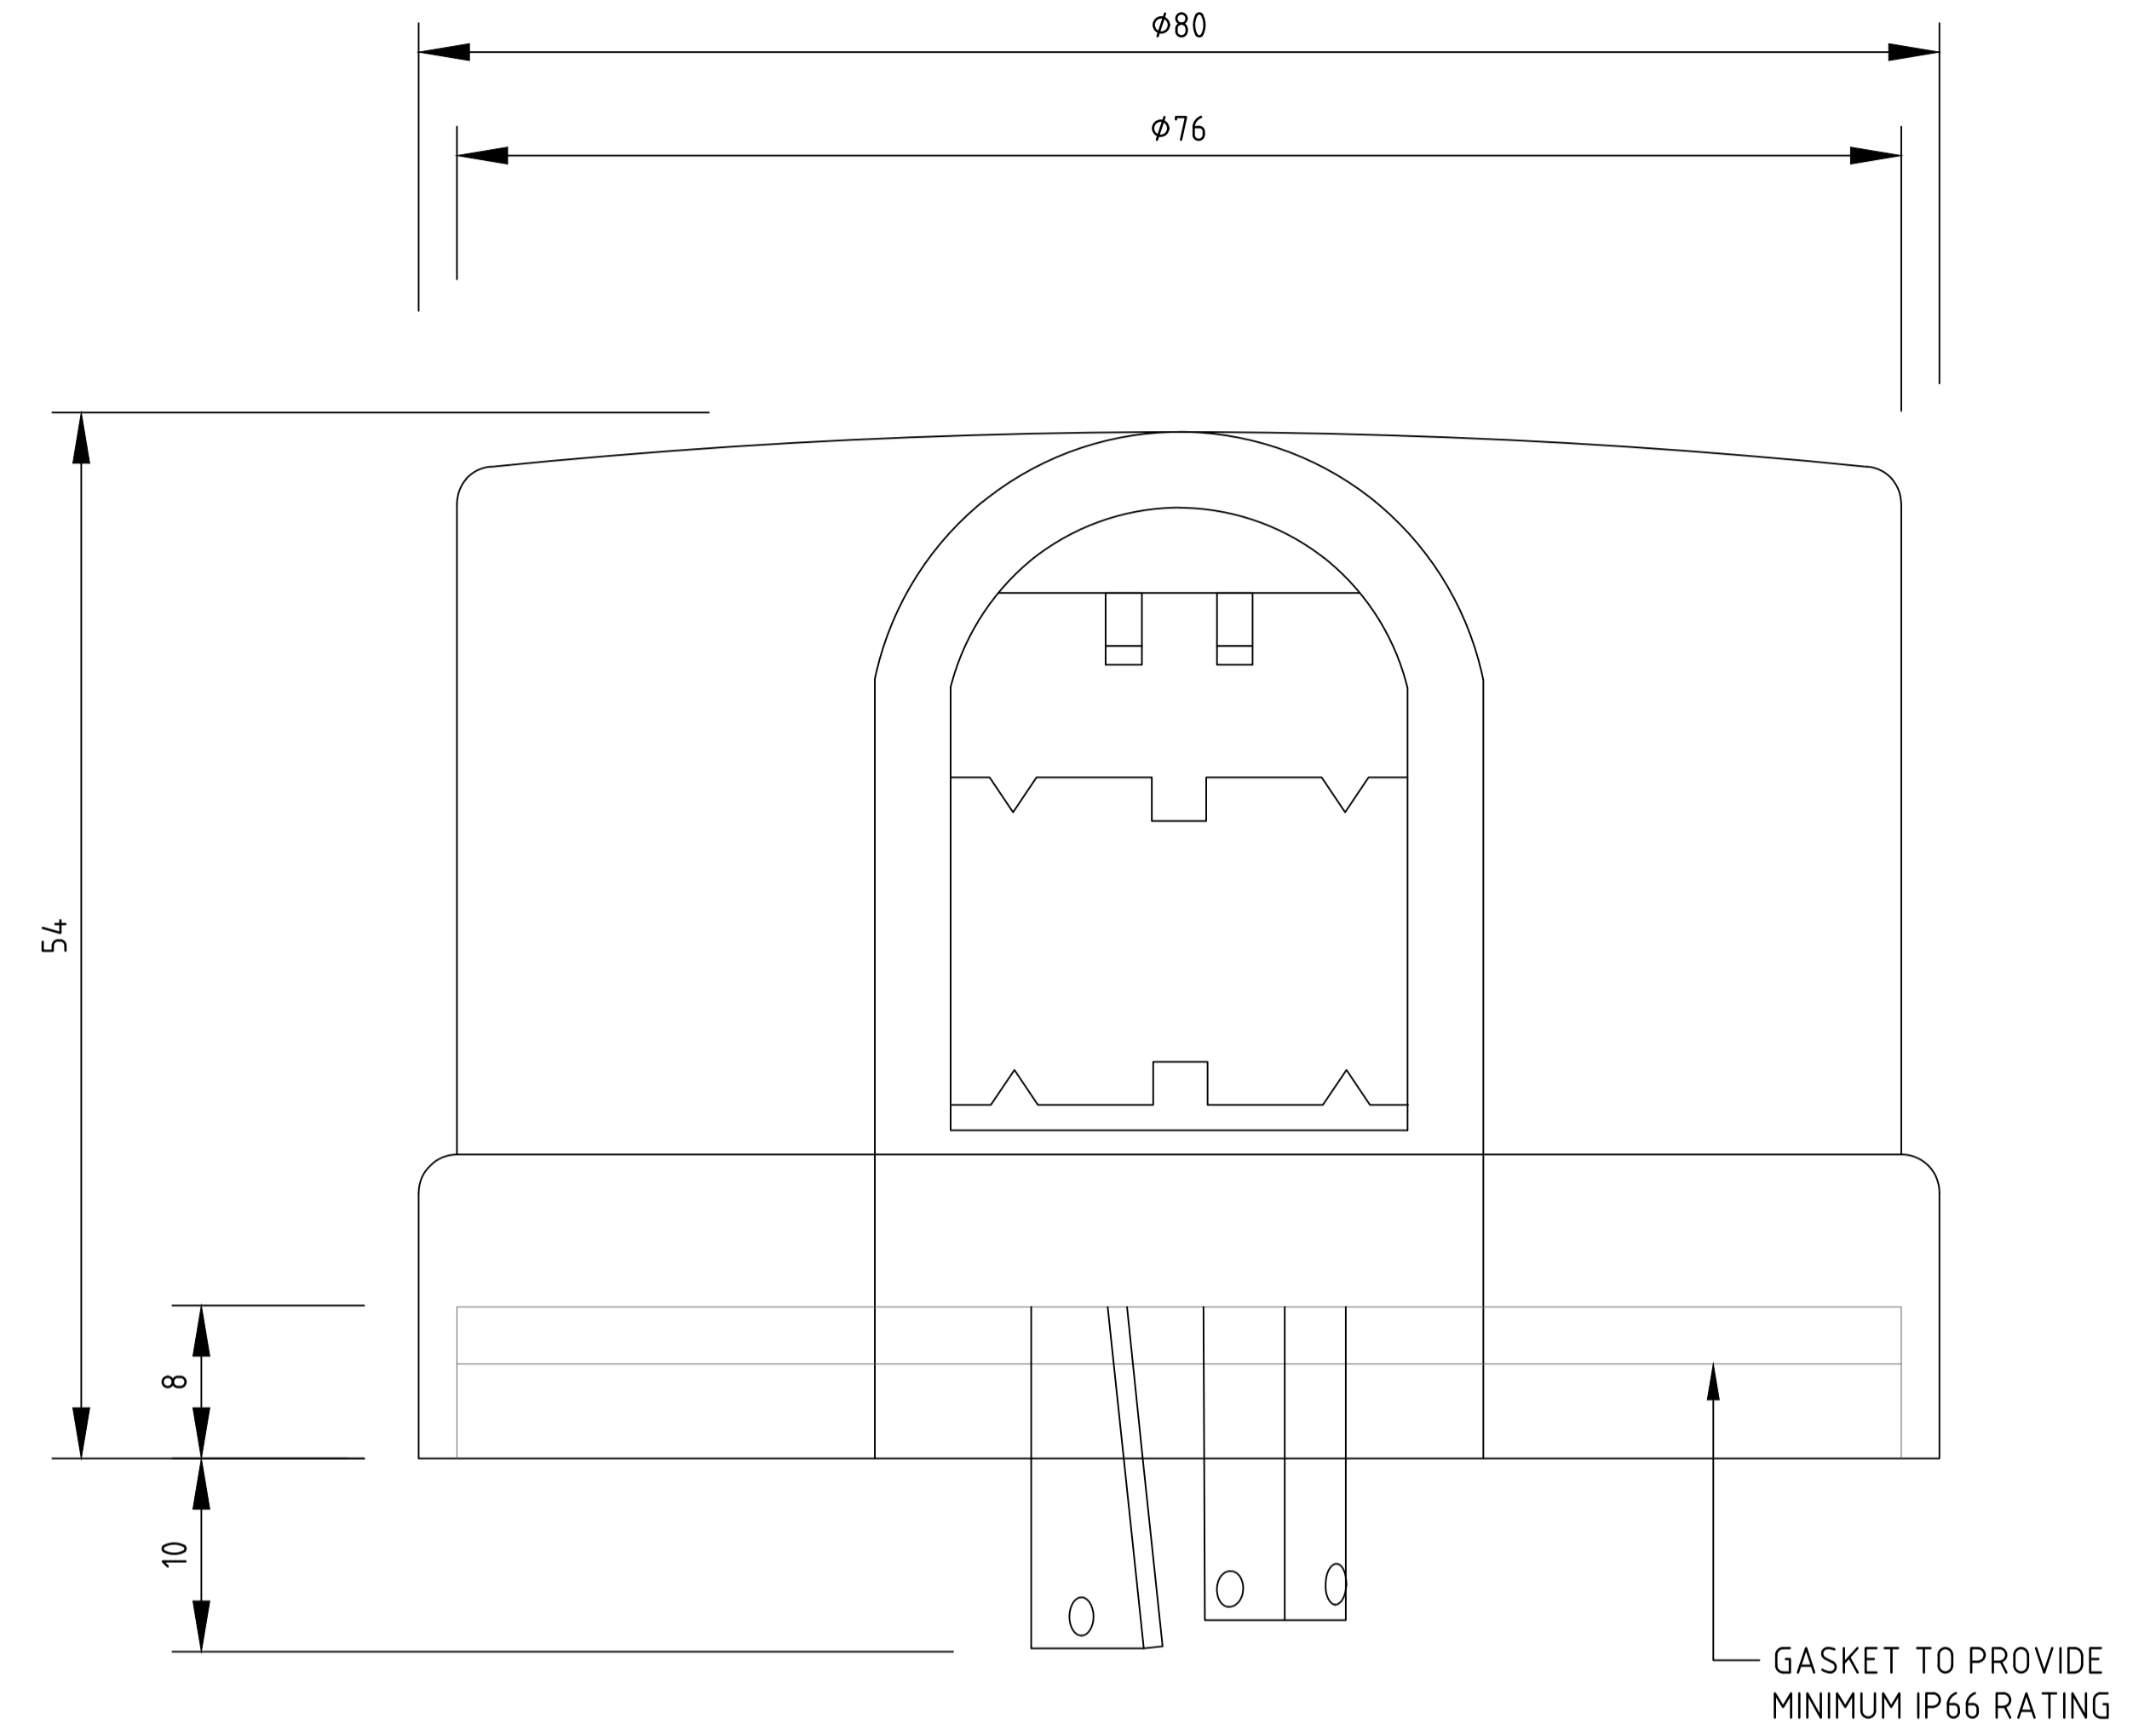

**ITEM 2**  
NOT TO SCALE

- PHOTOELECTRIC LIGHTING CONTROL - 240V, 10A
- VOLTAGE - 240V
  - CURRENT RATING - 10A
  - BASE TYPE - NEMA
  - OPERATION - THERMAL
  - SURGE PROTECTION - ENCLOSED TYPE EXPULSION DESIGN - >2.0 kV SPARK OVER  
10.0 kA FOLLOW THROUGH
  - TESTS - TO BS5972 OR ANSI C136.10

No.	DESCRIPTION	DATE	NAME	DEPT/COMPANY
0	ISSUED AS A STANDARD DRAWING	SEP 2025	N.V.	DLI
AMENDMENTS				

**WARNING**  
BEWARE OF UNDERGROUND SERVICES.  
THE LOCATIONS OF UNDERGROUND SERVICES ARE APPROXIMATE ONLY AND THEIR EXACT POSITION SHOULD BE PROVEN ON SITE. NO GUARANTEE IS GIVEN THAT ALL EXISTING SERVICES ARE SHOWN.

DRAWN PWC	CHECKED T.Berrill
DATE	DATE
DESIGNED PWC	CHECKED T.Berrill
DATE	DATE
DESIGN LEADER	DESIGN DIRECTOR
DATE	DATE



STANDARD DRAWINGS STREETLIGHTING ELECTRICAL SWITCHES AND RECEPTACLES PHOTOELECTRIC					
FILE No.	ASSET No.	SHEET No.	DRAWING No.	AMEND.	SHEET SIZE
-	-	1 OF 1	CS3905	0	A1