


G9 - 22 - 1 DEPTH INDICATOR
NOT TO SCALE

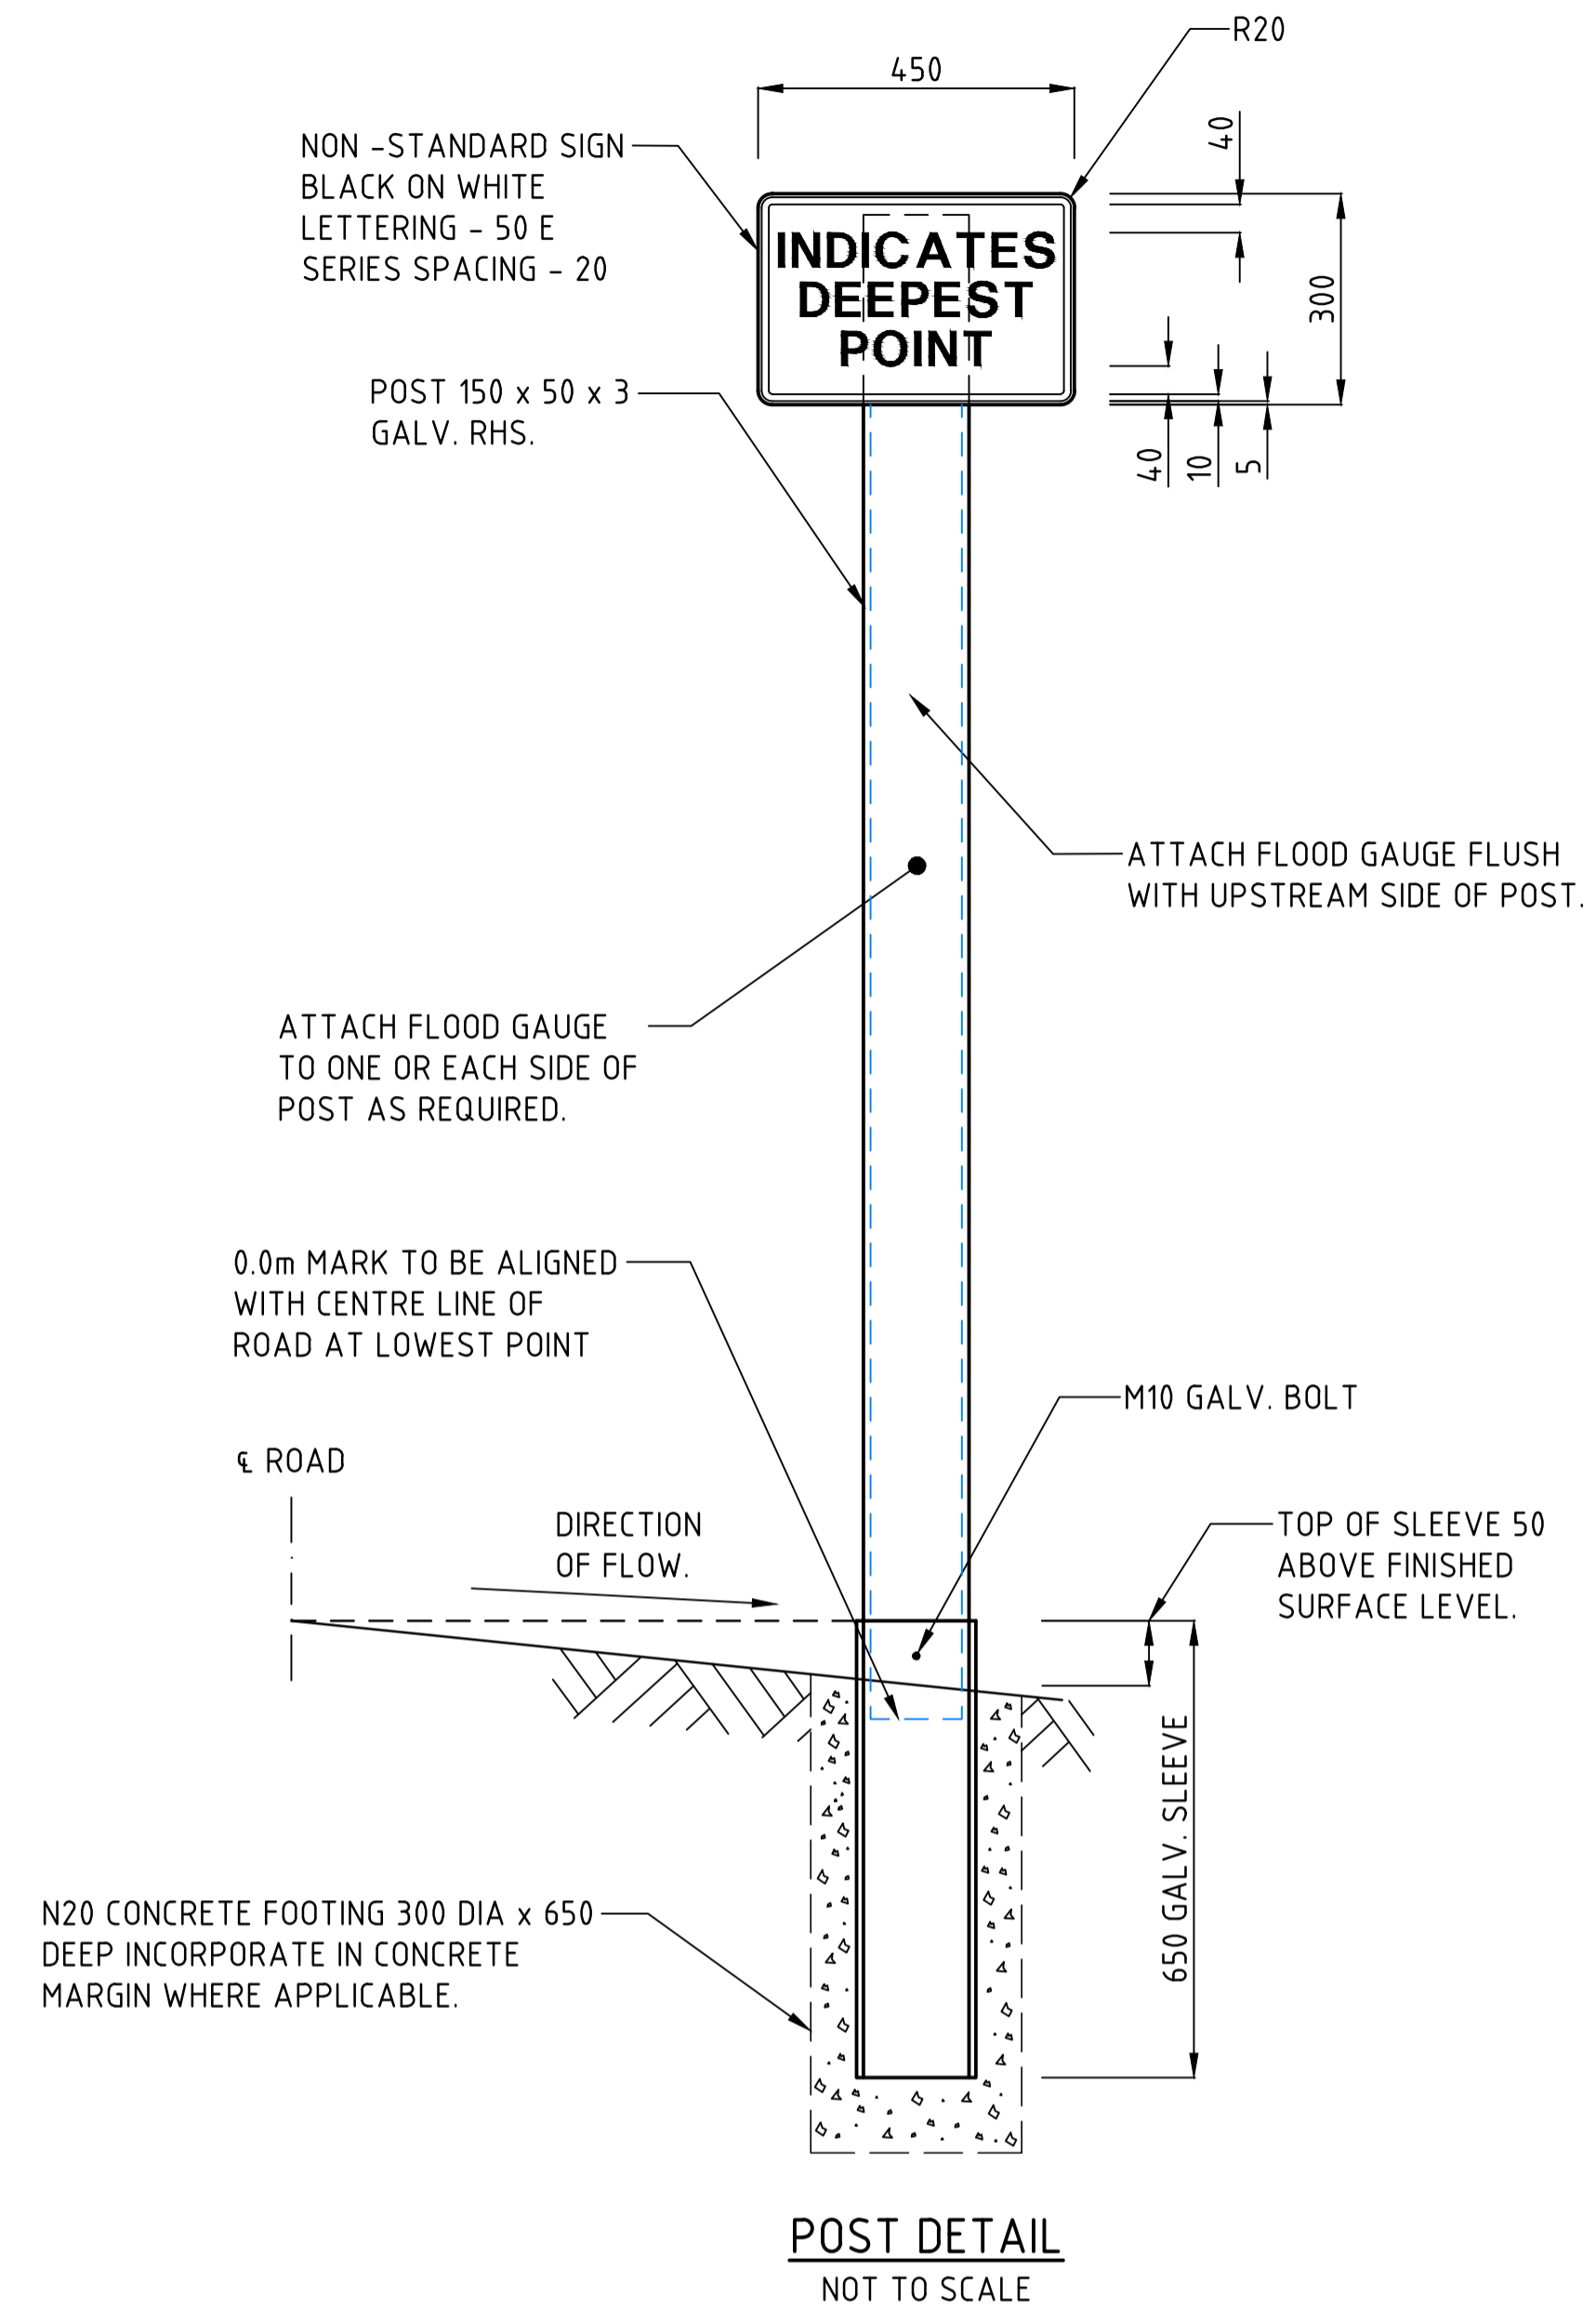

FLOODWAY LENGTH	No. OF F.G.M
< 80m LONG	PAIR IN MIDDLE
80m TO 150m LONG	PAIR AT START AND END
> 150m LONG	PAIRS EVERY 75m

ALL FLOOD GAUGE MARKERS (F.G.M.) ARE TO BE TWO SIDED.

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- MANUFACTURE SIGNS IN ACCORDANCE WITH AS 1742.1, AS 1743 AND AS 1744 UNLESS SHOWN OTHERWISE. USE 1.6mm ALUMINIUM SHEET.
- SECURE DEPTH INDICATORS TO POST WITH GALVANISED TEK SCREWS OR BLIND POP RIVETS AT 200mm CENTRES EACH SIDE.
- USE CLASS 1 RETROREFLECTIVE MATERIAL.
- USE G9 - 22 - 2 OR G9 - 22 - 3 AS REQUIRED.

No.	DESCRIPTION	DATE	NAME	DEPT./COMPANY
1	MINOR CHANGES	JAN 2024	D.LLANO	DIPL
0	ISSUED AS A STANDARD DRAWING	SEPT 2017	J.LEESON	EES/DIPL
AMENDMENTS				

WARNING
BEWARE OF UNDERGROUND SERVICES.
THE LOCATIONS OF UNDERGROUND SERVICES ARE APPROXIMATE ONLY AND THEIR EXACT POSITION SHOULD BE PROVEN ON SITE. NO GUARANTEE IS GIVEN THAT ALL EXISTING SERVICES ARE SHOWN.

DRAWN J.LEESON	CHECKED S.HATZI
DATE MAR 2017	DATE MAR 2017
DESIGNED	CHECKED
DATE	DATE
DESIGN LEADER S.HATZI	DESIGN DIRECTOR S.JACKSON
DATE 1/09/2017	DATE 1/09/2017



STANDARD DRAWINGS ROAD FURNITURE & SIGNS		FLOOD GAUGE MARKER	
FILE No.	ASSET No.	SHEET No.	DRAWING No.
-	-	1 OF 1	CS-3501
AMEND.		SHEET SIZE	
1		A1	